


## Merlin Xtreme offset

### Regular Maintenance

### Belt Adjustment

- Check the condition of drive belts, ensuring they are aligned and properly tensioned to avoid any unnecessary belt wear.
- Remove both guards for access when tensioning belts; ensure belts are running in line after adjustment. Required tension is shown in the illustration below.
- Check there is no wrapping of string, plastic, grass or other debris on rear roller.

**NOTE:** The pulleys are fitted with taper locks which have 7 screws to tighten and 3 holes to aid removal in the pulley centers.

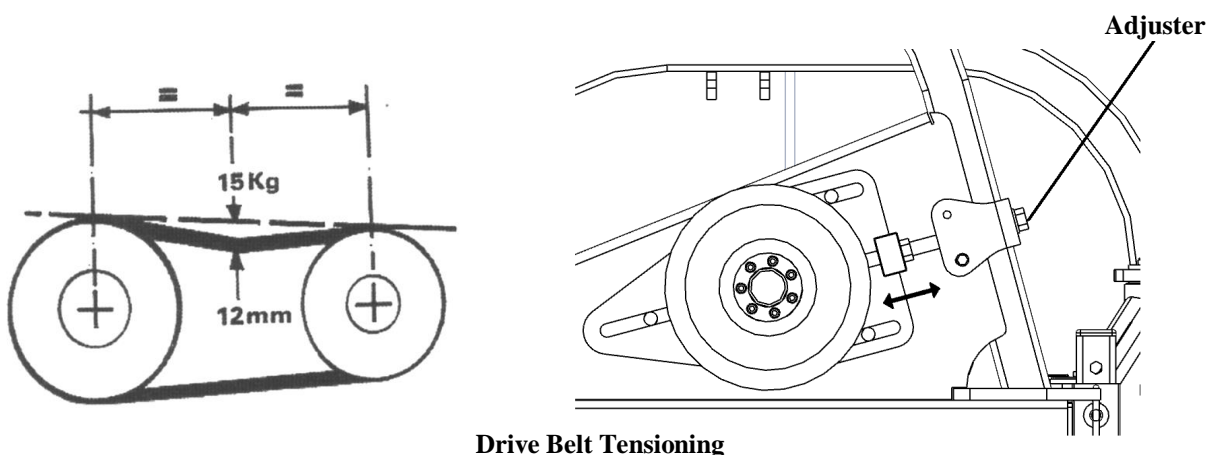

Drive Belt Tensioning

